Portable Performance Packages E20 or E30



Two Highly Portable units combine to provide one High Performance Package





Note: Shown with optional treadbrite walls

Many Uses

- ➤ High Rise Buildings
- ✓ fits inside elevator & thru standard man door
- ➤ Large Commercial Projects
- ✓ quickly & easily roll to desired location

Many Benefits

- > Expand your Business
- \checkmark add a '2nd rig' for a fraction of the cost
- ➤ Portable High Production unit
- ✓ E20 or E30 reactor
- ➤ Modular Design

integrity excellence innovation trust

303-833-6644

www.inteccorp.com

Enhance your foaming experience








Rev: 20241103

Foam Rigs to Meet Your Business Model

Specifications

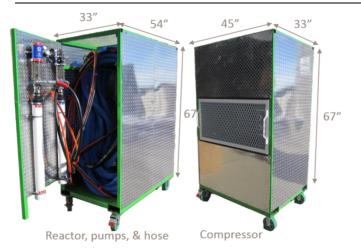

- · Graco E20 reactor standard; E30 reactor optional.
- Standard configuration includes 60 feet scuff covered hose.
 - Optional: Can add 50 foot sections of hose to allow for:
 - up to 210 feet with E20.
 - up to 310 feet with E30.
- T1 or T2 transfer pumps.
- Fusion AP gun.
- Champion 5hp 2 stage reciprocating compressor with after cooler & 10 gallon storage tank.
- · Champion 15cfm refrigerated air drier.
- Electrical Requirements 230V single phase.
 - Reactor Cart: 50 amp for standard E20 reactor unit
 - 100 amp for E30 with 10kW heaters
 - 125 amp for E30 with 15kW heaters

• Compressor Cart: 30 amp

Features

Removable hose hooks standard to wrap additional hose on outside of unit



Locking doors secure your items

Heavy duty, easy to roll casters simplify portability





Standard configuration with 60' scuff covered hose

25' power cord and supply air hose to connect cages to each other



Note: Features & specifications subject to change. Please consult your PPS associate for current build features & specifications.



Distributed by



Manufactured by

Insulation Technology Corporation, d.b.a. Intec 9251 Bruin Boulevard

Frederick, CO 80504 www.inteccorp.com

Phone: 303-833-6644 info@inteccorp.com